

## Series 4, Wall-mounted canopy rangehood, 90 cm, Stainless steel DWB97DM50A



DHZ1225	Chimney extension 1000 mm
DHZ1235	Chimney extension 1500 mm
DHZ9550	Brushed steel back panel
DHZ9551	Brushed steel back panel
DWZ0XX0J0	Long Life recirculation kit
DWZ1DX1B4	Clean Air Standard odor filter (repl.)
DWZ1DX114	Clean Air Standard recirculation kit
DWZ1DX116	Clean Air Plus recirculation kit
DWZ1FX5C6	Clean Air Plus recirc. kit external
DWZ1FX5D1	Long Life recirculation kit external
DZZ0XX0P0	Long Life odor filter (replacement)
DZZ1XX1B6	Clean Air Plus odor filter (replacement)

## Canopy rangehood: performance and matching kitchen design bundled in one rangehood.

- **LED lighting:** energy-efficient LED lighting for bright, even cooktop illumination.
- **Intensive speed setting:** quickly removes steam and strong cooking odours for a fresher kitchen.
- **TouchSelect control:** Quickly select hood settings via touch.

Color chimney:	Stainless steel
Typology:	Wall-mounted
Length electrical supply cord:	130 cm
Height of the chimney:	583-912/583-1022 mm
Height of product, without chimney:	53 mm
Minimum distance above an electric hob:	600 mm
Minimum distance above a gas hob:	650 mm
Net weight:	13.8 kg
Type of control:	Electronic
Number of speed settings:	3-stages + intensive setting
Max. air extraction:	454 m <sup>3</sup> /h
Boost position output recirculating:	499 m <sup>3</sup> /h
Max. air recirculation:	404 m <sup>3</sup> /h
Boost position air extraction:	739 m <sup>3</sup> /h
Number of lights:	2
Noise level:	65 dB(A) re 1pW
Diameter of air outlet:	120 / 150 mm
Grease filter material:	Washable stainless steel
EAN code:	4242005087594
Connection rating:	255 W
Fuse protection:	10 A
Voltage:	220-240 V
Frequency:	60; 50 Hz
Plug type:	AU plug
Installation type:	Wall-mounted



4 242005 087594

## **Series 4, Wall-mounted canopy rangehood, 90 cm, Stainless steel DWB97DM50A**

### **Canopy rangehood: performance and matching kitchen design bundled in one rangehood.**

---

#### **Design and Innovation**

- Wall mounted rangehood
- Box brand design
- TouchControl for power and light
- 3 power settings plus intensive setting

#### **Power and Mode of Operation**


- Max. extraction rate: 740 m<sup>3</sup>/h
- Noise min./max. Normal Level: 52/65 dB\*
- 2 x LED Lights
- Dishwasher safe metal grease filters

#### **Technical Information**

- Suitable for ducted or recirculated extraction
- Recirc. kit or clean air kit
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Appliance (ducted air): 635-965 MM x 900 x 500 mm
- Dimensions exhaust air (HxWxD): 635-965 x 900 x 500 mm
- Dimensions recirculating (HxWxD): 635-1075 x 900 x 500 mm
- Dimensions recirculating with CleanAir module (HxWxD):
  - 703 x 900 x 500mm - mounting with outer chimney
  - 833-1163 x 900 x 500 mm - mounting with telescopic chimney
- Dimensions recirculating with cleanAir module (HxWxD);
  - 703 x 900 x 500mm - mounting with outer chimney
  - 833-1163 x 900 x 500 mm - mounting with telescopic chimney
- Dimensions recirculating with CleanAir module (HxWxD):
  - 703 x 900 x 500mm - mounting with outer chimney
  - 833-1163 x 900 x 500 mm - mounting with telescopic chimney
- Power rating: 255 W
- Electrical cable length 1.3 m


\* In accordance with the EU-Regulation No 65/2014 \* In accordance  
with the EU-Regulation No 65/2014

**Series 4, Wall-mounted canopy  
rangehood, 90 cm, Stainless steel  
DWB97DM50A**

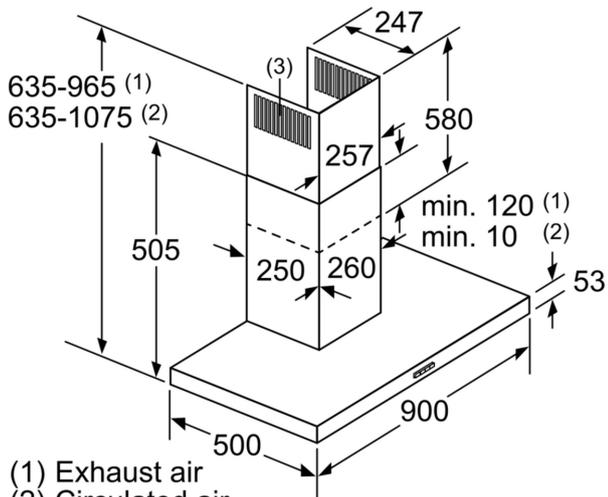

- (1) Exhaust air
- (2) Circulated air
- (3) Air outlet – slots for exhaust air to be mounted facing down


measurements in mm

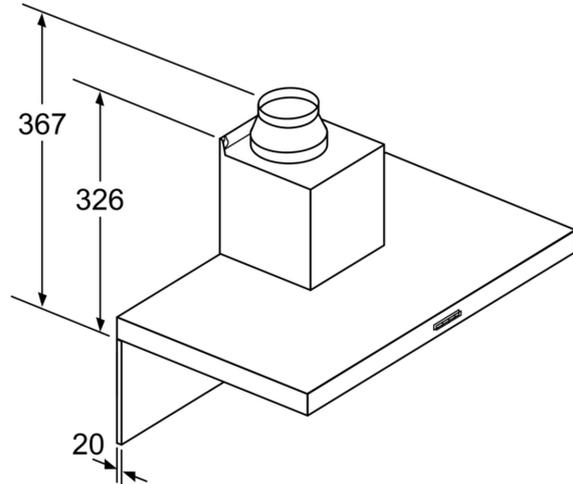

If a back panel is used,  
the design of the appliance  
must be considered.


measurements in mm

Measurements in mm

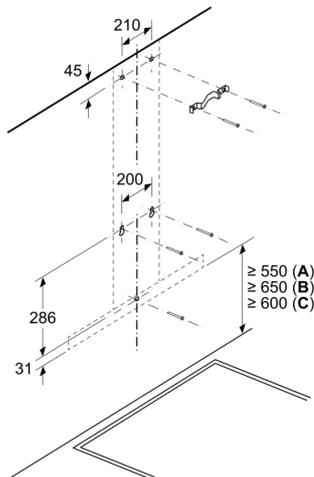

- A: Electric
- B: Gas - from upper edge of pan support
- C: Electric - for Australia and New Zealand

Measurements in mm

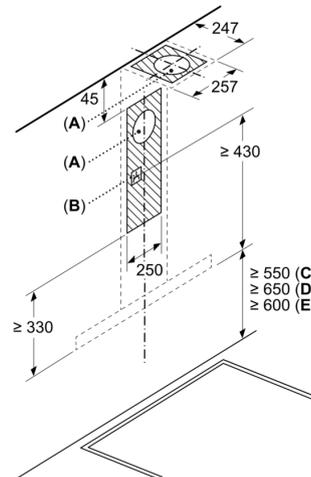

- A: Exhaust air outlet
- B: Socket
- C: Electric
- D: Gas - from upper edge of pan support
- E: Electric - for Australia and New Zealand